







REV	DESCRIPTION	DATE	APPROVED
A	INITIAL DRAWING. RELEASE FOR PRODUCTION	9/27/10	B.MOTT






CCC MALE POWER PLUG
PRODUCT CODE NUMBER: 17753
NEMA 5-15 180 EXIT

SELECT






CCC FEMALE POWER PLUG
PRODUCT CODE NUMBER: 17754
C-13 180 EXIT

SELECT

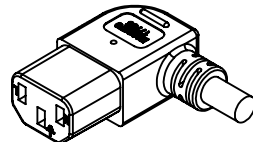

CCC FEMALE POWER PLUG
PRODUCT CODE NUMBER: 17755
C-13 90 EXIT LEFT


SELECT



CCC FEMALE POWER PLUG
PRODUCT CODE NUMBER: 17755
C-13 90 EXIT RIGHT

SELECT

(ONLY 1 CONDUCTOR SHOWN FOR CLARITY)

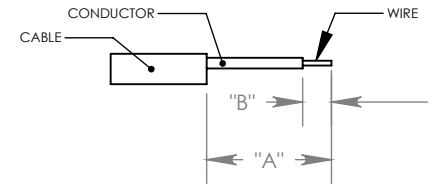

- O - BLUNT END (NO JACKET STRIP)
- O - STRIP JACKET AND/OR CONDUCTOR
- "A" DIMENSION = _____ INCHES
- "B" DIMENSION = _____ INCHES
- OPTIONS
- O - LEAVE SLUG ON
- O - TIN WIRE END

AWG OF CABLE

- O - 14 AWG CABLE (105 C)
- O - 18 AWG CABLE (105 C)

LENGTH

LENGTH OF ASSEMBLY (OVERALL)


LENGTH = _____ INCHES

TOLERANCE = +/- 2%

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF CARRIO CABLING CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF CARRIO CABLING CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:	
DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL ± ANGULAR: MACH ± BEND ± THREE PLACE DECIMAL +/- .005 FORTH PLACE DECIMAL +/- .0002	
INTERPRET GEOMETRIC TOLERANCING PER:	
MATERIAL XXX	
PLATING	
NEXT ASSY	USED ON
APPLICATION	
DO NOT SCALE DRAWING	

NAME	DATE
B.MOTT	9-27-10
DRAWN	
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

 CARRIO CABLING CORPORATION
2455 EXECUTIVE CIRCLE
COLORADO SPRINGS, CO. 80906

TITLE: CARRIO CABLING CORPORATION
U.L. APPROVED
POWER CORD END OPTIONS

CARRIOCABLING.COM

SIZE	DWG. NO.	REV
A	CCC POWER CORD OPTIONS	A

SCALE: 1:1 WEIGHT: SHEET 1 OF 1